

MODEL AND SIGNIFICANCE

S

Enterprise code

L7N

Design Number

-


125

Case grade rated current

D

High voltage

ADVANTAGE

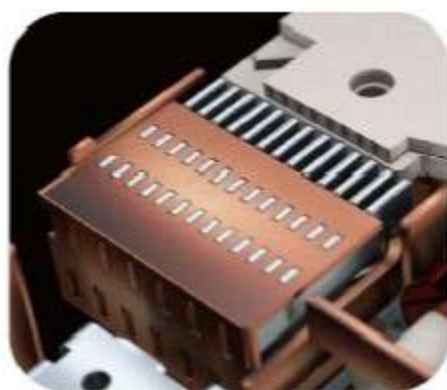

Multi-gate interrupter

The arc extinguishing chamber adopts a multi-grid arc extinguishing chamber, and each pole is equipped with 2 arc extinguishing chambers to enhance the arc extinguishing capacity



Vent design

New design of vent holes, arc out of gas more smoothly



Static contact

The static contact arc ignition design is more conducive to the arc entering the arc extinguishing chamber



PA66 flame retardant material

flame retardant rating of V-0

SL7N-125D
3P DC1500V

SL7N-125D
2P DC1000V



DC MCB


S L 7 N - 1 2 5 D

www.chinasuntree.com


SPECIFICATIONS

MODEL	SL7N-125D	
Products name	PV DC MCB	
Pole	1P, 2P, 3P, 4P	
Rated operational voltage(Ue)	1P:DC48~250V;DC375V;440V;DC600V 2P:DC750V;DC800V;DC1000V 3P:DC1200V;DC1500V 4P:DC1500V	
Rated insulation voltage(Ui)	690V(1P);1000V(2P);1500V(3P/4P)	
Rated impulse withstand voltage(Uimp)	4KV(1P);6KV(2P);8KV(3P/4P)	
Case grade rated current(In)	125A	
Rated operational current(In)	16A;10A;16A;20A 25A;32A;40A;63A;80A	1P:DC48~250V;DC375V;440V;DC600V 2P:DC750V;DC800V;DC1000V 3P:1200V/1500V; 4P:DC1500V
	100A;125A	1P:DC48V~250V 2P:DC375V;440V;DC600V 3P:DC750V;DC800V 4P:DC1000V;DC1200V
Rated ultimate short circuit breaking capacity(Icu)	2kA Type H: 6kA	
Running breaking capacity(Ics)	2kA Type H: 6kA	
Mechanical life	10000	
Electrical life	2000	
Installation	Din	
Relative humidity	+50°C not more than 95%	
Wiring polarity requirements	NO	
Working temperature	-40°C ~+75°C	


WIRING DIAGRAM



2P



3P

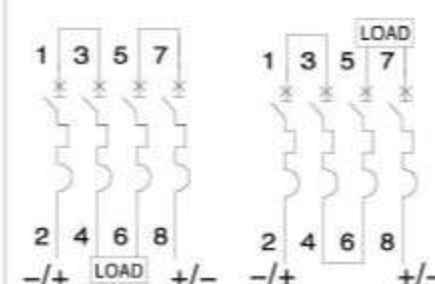

4P

DIMENSION

