## Monocrystalline **Solar PV Module 330 WATTS**






## **FEATURES**

## Power and tolerance 0~+3W positive power tolerance guarantee













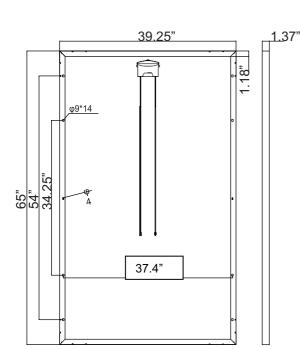

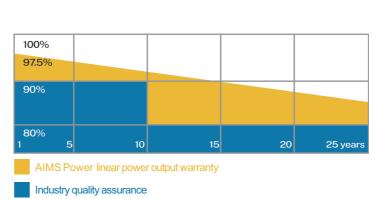

12 12 years of product material and process quality assurance

25 25 years linear power output warranty








MODEL	PV330MONO
Maximum Power/Pmax(Wp)	330
Optimum Operating Voltage/Vmp(V)	33.9
Optimum Operating Current/Imp(A)	9.73
Open Circuit Voltage/Voc(V)	41.5
Short Circuit Current/Isc(A)	10.22
Cell Efficiency	21.47%
Module Efficiency	19.78%
Power Tolerance	0~+3W
Maximum Series Fuse Rating(A)	20A
Maximum System Voltage	1500VDC

Operating Module Temperature	-40°C to +85°C	°C
Storage Temperature	From -40°C to +85°C	°C
Insulation Cut Voltage	1000	DC
Maximum Wind Resistance	60m/s	N/m² or max KM/h
Surface Maximum Load Capacity	200	Kg/m²
Maximum Hail Load Capacity	5mm	80km/h

Nominal Operating Cell Temperature (NOTC)	45±2°C
Temperature Coefficient of Pmax	-0.38%/°C
Temperature Coefficient of Voc	-0.29%/°C
Temperature Coefficient of Isc	-0.048%/°C
·	

60 (10*6)	
158.75 * 158.75	
65 x 39.25 x 1.37	
39.7	
Clear anodized aluminum frame	
3.2mm tempered glass	
Anodized aluminum alloy	
EVA (Light transmittance more than 92%)	
TPT (High weather resistance)	
lp68 (1500V system voltage available)	
90cm 2x4.0mm² MC4 connector (35.5")	
5BB	

## **I-V CURVE**

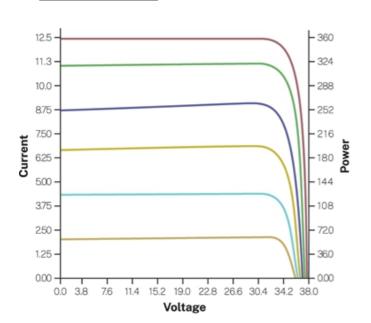

- Sun:1200, Vmp:31.945, Pmax:358.391
- Sun:1000, Vmp:32.500, Pmax:320.028
- Sun:800, Vmp:32.338, Pmax:256.359
- Sun:600, Vmp:32.295, Pmax:190.937
- Sun:400, Vmp:32.116, Pmax:125.597
- Sun:200, Vmp:31.577, Pmax:59.553