




# 20A LITHIUM-IRON PHOSPHATE (LFP) BATTERY CHARGER

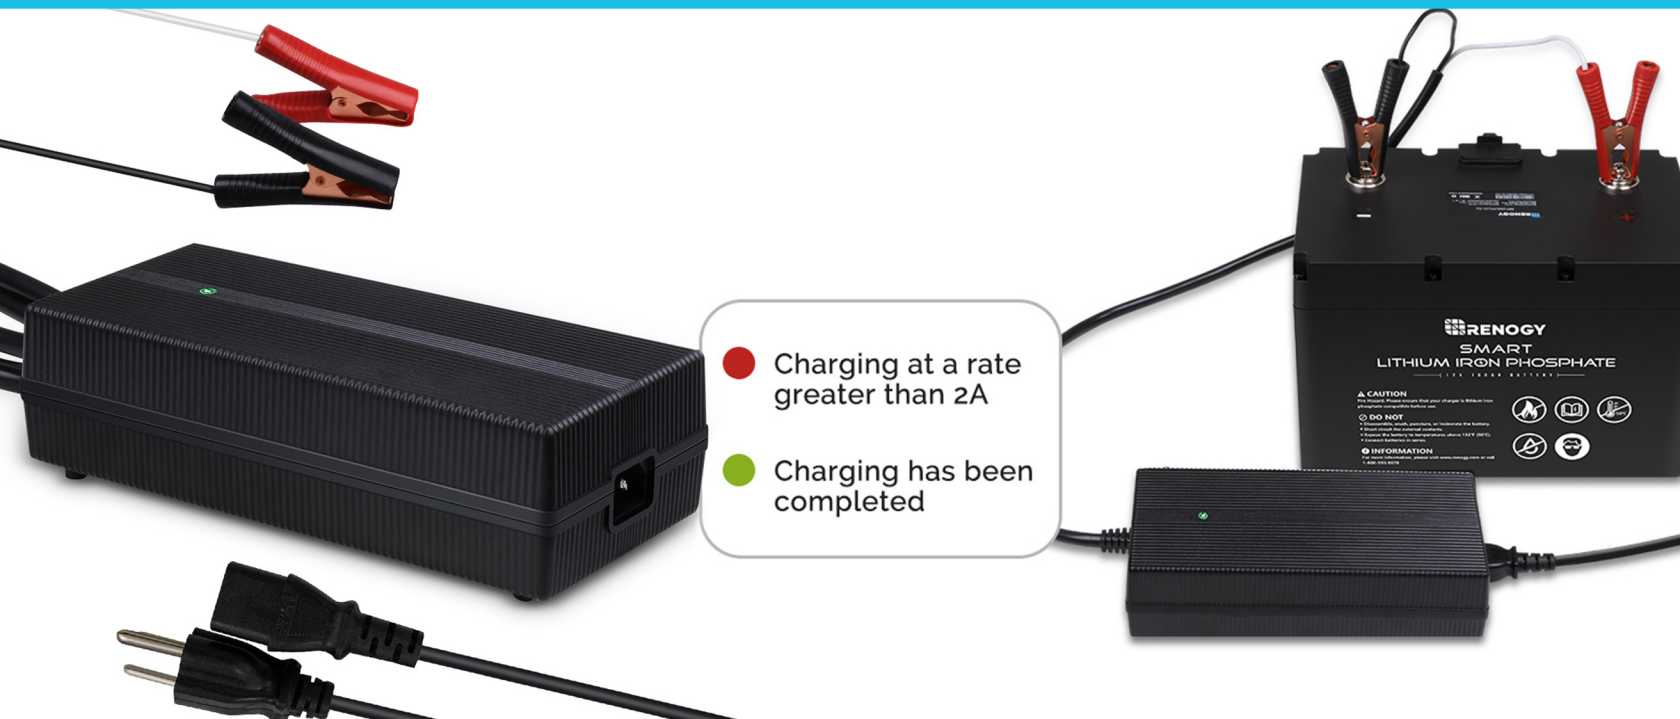

## RENOGY 20A LITHIUM-IRON PHOSPHATE (LFP) BATTERY CHARGER

Meet the all-new Renogy 20A Lithium-iron Phosphate (LFP) Portable Battery Charger! Compact yet rugged, the LFP Battery Charger automatically charges and maintains your lithium battery bank granting you peace of mind. An intuitive LED indicator communicates the charge state of the LFP Charger, while the alligator clips make this battery charger a simple plug-and-play. The 20A LFP charger is the perfect companion for your lithium battery setup and works great as your backup charger if needed. The LFP Charger is fully certified for a safety guarantee!

### KEY FEATURES

- Automatic LFP Battery Charging with a wide input voltage range
- Easy-to-understand LED indicator for charge status
- Simple Plug-and-Play Technology with Alligator Clips
- Compatible with Renogy 12.8V Lithium Batteries

## Specifications

<b>Input Voltage</b>	<b>100-240 VAC ~ 50/60Hz</b>
<b>Input Amps</b>	<b>5A Max</b>
<b>Output Voltage</b>	<b>14.6 VDC</b>
<b>Output Amps</b>	<b>20A</b>
<b>Minimum Battery Voltage</b>	<b>8V</b>
<b>Efficiency</b>	<b>93%</b>
<b>Room Operating Temperature**</b>	<b>-29°C ~ 45°C / -20°F ~ 113°F</b>
<b>Storage Temperature</b>	<b>-40°C ~ 75°C / -40°F ~ 167°F</b>
<b>Self-Consumption</b>	<b>50mA</b>
<b>Current Protection</b>	<b>250V 10A Fuse built in</b>
<b>Dimensions</b>	<b>9.17 x 4.25 x 2.52in / 233 x 108 x64mm</b>
<b>Weight</b>	<b>3.75 lbs / 1.7kgs</b>
<b>Cable Length</b>	<b>Approx 39in / 1000mm</b>
<b>Cable Gauge</b>	<b>12 AWG</b>
<b>Protection</b>	<b>Overcurrent Protection (Fuse 250V 10A) Short Circuit Protection</b>
<b>Certifications</b>	<b>CE, FCC, TUV, ETL</b>

