

Mono Power: 500W
Dimensions: 82.44*44.65*1.38inch



Characteristics

- High efficiency solar cell to keep the modules efficiency reach to 21.05%.
- Positive tolerance to ensure higher output.
- Excellent performance under weak light conditions.
- Modules withstand extremely (temperature, load and impact) TUV certification.
- All modules combination and packing through stepping current to keep effectively reduce mismatch loss.
- 100% EL test to keep higher quality.




Anodized aluminum frame withstand corrosion and damage, Special osculum can reduce destruction by water freeze.



IP68 junction box long-term weather endurance.

Warranty

- 25 years Linear Product Workmanship Warranty.
- 10 years workmanship warranty.

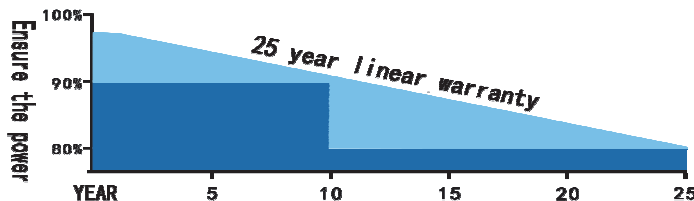

Quality and safety

- ISO9001:2015、ISO14001:2015、ISO45001:2018 certified supplier, we provide world first class solar products for clients.
- TUV,IEC,CEC,CE,CB approved.



Electrical Characteristics

Model No.	SG-500WM
Maximum Power (Pmax)	500W
Max-power Voltage (Vmp)	37.60V
Max-power Current (Imp)	13.30A
Open-circuit Voltage (Voc)	44.36V
Short-circuit Current (Isc)	14.09A
Module Efficiency	21.05%
Operating Temperature	-40°F to 185°F(-40°C~+85°C)
Maximum System Voltage	1500Vdc
Maximum Series Fuse Rating	20A
Power Tolerance	± 3%

*STC condition: 1000 W/m², 1.5AM and 25°C cell temperature.

Temperature Characteristics

NMOT	46°C±2°C
Temperature Co-efficient of Pmax	-0.36%/°C
Temperature Co-efficient of Voc	-0.28%/°C
Temperature Co-efficient of Isc	0.048%/°C


Mechanical Characteristics

Mono Power	500W
Cell Type	Mono182*91mm
Cell Arrangement	132(6*22)
Dimensions	82.44*44.65*1.38 (2094*1134*35mm)
Weight	56.2lbs(25.5kg)
Front Cover	3.2mm tempered glass
Frame Material	Anodized aluminium alloy
Junction Box	IP68 rated
Output Cables	4mm ² ,Length: (+) 300mm/ (-) 300mm

Packing

Packing	40HC
Pieces/Pallet	31
Pieces/container	682

I-V Curve

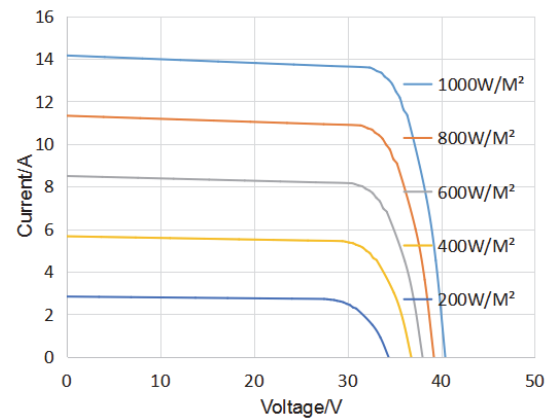

Dimensions

